

(51) International Patent Classification <sup>6</sup> : C04B 41/50, G21F 9/30, 9/00, B44C 1/02		A1	(11) International Publication Number: WO 95/35269
			(43) International Publication Date: 28 December 1995 (28.12.95)
(21) International Application Number: PCT/GB95/01421			(81) Designated States: CA, JP, KR, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i>
(22) International Filing Date: 16 June 1995 (16.06.95)			
(30) Priority Data: 9412237.1	17 June 1994 (17.06.94)	GB	
(71) Applicant (for all designated States except US): BRITISH NUCLEAR FUELS PLC [GB/GB]; Risley, Warrington, Cheshire WA3 6AS (GB).			
(72) Inventors; and (75) Inventors/Applicants (for US only): LI, Lin [CN/GB]; 5 Red-main Way, Croxteth, Liverpool L12 0LU (GB). SPENCER, Julian, Timothy [GB/GB]; British Nuclear Fuels plc, Spring-fields Works, Salwick, Preston PR4 0XJ (GB). STEEN, William, Maxwell [GB/GB]; Linkside, Links Hey Road, Cadley, Wirral L48 1BU (GB).			
(74) Agent: MCCORMACK, Derek, James; Intellectual Property & Patents Dept., British Nuclear Fuels plc, Risley, Warrington, Cheshire WA3 6AS (GB).			

The diagram illustrates a mechanical assembly, possibly a door lock or a latch mechanism. The main body (11) is shown with a handle (23) and a latch (13). A cable (7) connects the latch to a rectangular component (3) which is mounted on a base (5) with wheels. Various other components are labeled with numbers: 19, 27, 29, 25, 9, 15, 17, 21, and 25.

A method of glazing a brick surface which comprises applying an intense supply of heat to the surface by one or more laser beams and wherein the glazing is achieved by direct laser melting of a controlled layer of brick surface. Alternatively, glazing is achieved by application to the brick surface of a coating comprising specified colouring pigments and/or materials that can improve the glazing quality, followed by laser melting of the coating into a portion of the brick surface.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

### GLAZING OF BRICKS

The present invention relates to glazing of bricks. Bricks are the oldest industrial material known to man. The use of bricks for construction can be dated back to 8000BC. Some brick structures which are over three thousand years old still maintain an attractive appearance. Generally bricks for buildings are classified into a) common bricks which does not require specific quality, b) facing bricks which are used for the decorative effects, and c) engineering bricks which have specific compressive strength and water absorption limits. These bricks are currently available manufactured from three types of materials sources as follows:

1) Clay brick: which is made of clays containing  $\text{Al}_2\text{O}_3$ ,  $\text{SiO}_2$ ,  $\text{Fe}_2\text{O}_3$  etc. The manufacturing of this type of brick has the longest history. It involves preparation of mouldable clays, moulding, drying and firing. The firing of the clays causes the water to be driven out (below  $150^\circ\text{C}$ ), chemical dehydration (starting at  $400-600^\circ\text{C}$ ), oxidation of any organic materials ( $250^\circ\text{C} - 700^\circ\text{C}$ ) and finally formation of ceramic bond between  $800 - 1300^\circ\text{C}$ . Since the materials are not molten, glazing does not take place at the manufacturing stage.

2) Sand-lime brick or flint lime brick. This type of brick is made of sand ( $\text{SiO}_2$ ), of crushed flint and hydrated lime,  $\text{Ca}(\text{OH})_2$ , compressed and hardened by treatment with steam under pressure in an autoclave. A similar firing process changes the hydraulic bonded materials into ceramic bonded brick. No melting takes place at this stage.

3) Concrete brick which consists of calcium,  $\text{SiO}_2$  and  $\text{Al}_2\text{O}_3$  compounds. A similar process to the clay brick and sand-lime is required to produce ceramic bonded bricks. No melting takes place.

In all of these kinds of bricks,  $\text{SiO}_2$  exists as one of the principal constituents. Upon melting amorphous glassy

materials can be formed. These are normally obtained during manufacturing of face bricks or tiles by inserting the brick or tiles into a molten glass bath.

After the bricks are used in building construction, no further modification of the bricks by melting or glazing normally takes place.

There are cases when decoration of the brick surface in the building is required at a particular location after the building has been built. Complex patterns or fine lines or various colours may be required and these cannot be made easily by prefabrication using tiles or face bricks.

There are also cases when some areas of bricks of buildings are contaminated by high levels of radioactive, biological or chemical substances. Glazing of the surface can immobilise, fix and seal the contamination in the bricks to prevent mobility of the contamination.

The purpose of the present invention is to provide a method of glazing a brick surface after the brick has been used to form part of a building structure.

According to the present invention there is provided a method of glazing a brick surface which comprises applying an intense supply of heat to the surface by one or more laser beams.

The glazing is achieved by direct laser melting of a controlled layer of brick surface or by application of a coating with specified colouring pigments and/or materials that can improve the glazing quality, followed by laser melting of the coating into a portion of brick surface.

The laser glazing of brick can be used to produce a protective, impermeable coating for a specialised structure for use in a chemical and nuclear plant installation.

The laser glazing of brick can also be used to seal or immobilise the surface and embedded contaminations thereon such as of a radioactive, biological or chemical nature

onto the surface of bricks forming the building or structures.

The laser glazing of brick can be used to produce artistic patterns, signs, symbols or various colours on existing buildings.

Glassy patterns or symbols can be formed on bricks of the building structure by laser melting of a thin layer of surface of fusion coating material with desired colours or properties by one or more laser beams on the brick. Since bricks are ceramic bonded blocks they do not suffer a bond weakening by laser generated heat affected zone as happens for hydraulic bonded materials such as concrete. The high SiO<sub>2</sub> content in the brick enables the formation of amorphous surface (glassy) after melting by laser beams.

A coating may be applied to the brick prior to the laser glazing. This coating may contain siliceous materials. The coating can be refractory cement, sand bonded with sodium silicate solution.

The laser treated brick surface depth may be between 0.1 to 2 mm. The bond between the glazed surface and substrate is a ceramic type which is not much weakened due to the laser heat effect. The result of the process is to generate an impermeable layer for the protection of underlying material, and to produce artistic patterns and to seal and remove contamination therewith.

A computer may be employed to generate a described pattern of a laser beam on a surface to provide a symbol, picture etc.

The said laser beam may be of ultraviolet, visible or infrared wavelength.

The laser beam may be generated by a laser generator such as a gas laser, eg a CO<sub>2</sub> gas laser or a CO gas laser, a solid state laser, eg a Nd-YAG (Neodymium-Yttrium-Aluminium-Garnet) or a Ti-Sapphire laser, an Excimer laser, a dye laser, a free electron laser or a semiconductor laser.

The laser beam may be either pulsed or continuous.

The laser beam may be applied from a laser source to the region of the surface to be treated via an operator handset or mobile application box adjacent to the wall which may be moved by a human or robotic operator to guide the beam to the required part of the surface to be treated. The beam may be delivered from the laser source to the handset by a flexible beam delivering system, eg one or more optical fibre guides or cables, or by optical mirrors which reflect the beam or by a hollow waveguide all in a known way. The handset may include a scanning means which sweeps the laser beam over the surface to be treated with a controlled sweep speed, pattern and rate.

The total laser power density of the laser beam or beams may be between 200 - 250 W/cm<sup>2</sup> depending on materials to be treated. Thus focusing of laser beam may or may not be needed depending on the raw beam diameter. The laser beam intensity may be from 150 W/cm<sup>2</sup> to 10 kW/cm<sup>2</sup>. The beam scanning speed may be from 1 mm/sec to 200 mm/sec depending on the type of brick treated.

An embodiment of the present invention will now be described by way of example with reference to the accompanying drawing, in which

Figure 1 is a side view of an arrangement for glazing the surface of a brick wall.

As shown in Figure 1, a laser 1 carried on a trolley 3 is controlled by a control unit 5 on the trolley 3. An output beam 6 provided by the laser 1 is conveyed by a guide 7 to a transparent box 9 movable on a wall by wheels 11 and supported by a support (not shown). The box 9 incorporates an x scan mirror 13 and a y scan mirror 15 both of which are motor controlled by a control 17 which controls the attitudes of the mirrors 13, 15 and the operation of a shutter 29. The mirrors 13, 15 are contained in an inner transparent enclosure 19. The beam 6 is guided via lenses 27 and the shutter 29 by the

5

mirrors 13 and 15 onto the surface of a brick wall 21 forming a glazed area 23 in a required pattern etc. as required. The box 9 may be pushed by a handle 25 held by a human or robotic operator.


Collimation of the beam 6 is provided by the lens 27 to convert the diverging beam from the guide 7 into a parallel beam of desired diameter.

30948

Claims

1. A method of glazing a brick surface which comprises applying an intense supply of heat to the surface by one or more laser beams and wherein the glazing is achieved by direct laser melting of a controlled layer of brick surface.
2. A method as in Claim 1 and wherein the glazing is achieved by application to the brick surface of a coating comprising specified colouring pigments and/or materials that can improve the glazing quality, followed by laser melting of the coating into a portion of the brick surface.
3. A method as in Claim 2 and wherein the coating comprises siliceous materials including refractory cement, and sand bonded with sodium silicate solution.
4. A method as in any one of the preceding claims and wherein the method is used to produce a protective impermeable coating for a specialised structure for use in a chemical and nuclear plant installation.
5. A method as in any one of Claims 1 to 3 and wherein the method is used to seal or immobilise the surface and embedded contaminations thereon, including contaminations of a radioactive, biological or chemical nature, onto the surface of bricks forming buildings or structures.
6. A method as in any one of Claims 1 to 3 and wherein glassy patterns or symbols are formed on bricks of buildings or structures by laser melting of a thin layer of surface of coating material having desired colours or properties by one or more laser beams on the brick.
7. A method as in Claim 6 and wherein a computer is employed to generate a described pattern of the laser beam on the surface to provide a symbol, pattern, sign, picture or the like.
8. A method as in any one of the preceding claims and wherein the laser treated brick surface depth is between 0.1mm to 2mm.

9. A method as in any one of the preceding claims and wherein the laser beam is of ultraviolet, visible or infrared wavelength.
10. A method as in Claim 9 and wherein the laser beam is generated by a laser generator selected from a gas laser, a solid state laser, an excimer laser, a dye laser, a free electron laser or a semiconductor laser.
11. A method as in Claim 9 or Claim 10 and wherein the laser beam is either pulsed or continuous.
12. A method as in any one of Claims 9 to 11 and wherein the total laser power density of the laser beam or beams is between  $200 \text{ W/cm}^2$  to  $250 \text{ W/cm}^2$ , the laser beam intensity is from  $150 \text{ W/cm}^2$  to  $10 \text{ kW/cm}^2$  and the beam scanning speed is from  $1 \text{ mm/s}$  to  $200 \text{ mm/s}$ .
13. A method as in any one of the preceding Claims and wherein the laser beam is applied from a laser source to the region of the brick surface to be treated via an operator handset or mobile application box adjacent to the surface, the handset or application box being moved by a human or robotic operator to guide the beam to the required part of the surface to be treated, the beam being delivered from the laser source to the handset by a flexible beam delivering system, the handset including a scanning means which sweeps the laser beam over the surface to be treated with a controlled sweep speed, pattern and rate.
14. A method as in Claim 13 and wherein the beam delivering system comprises one or more optical fibre guides or cables.
15. A method as in Claim 13 and wherein the beam delivering system comprises optical mirrors which reflect the beam.
16. A method as in Claim 13 and wherein the beam delivering system comprises a hollow waveguide.

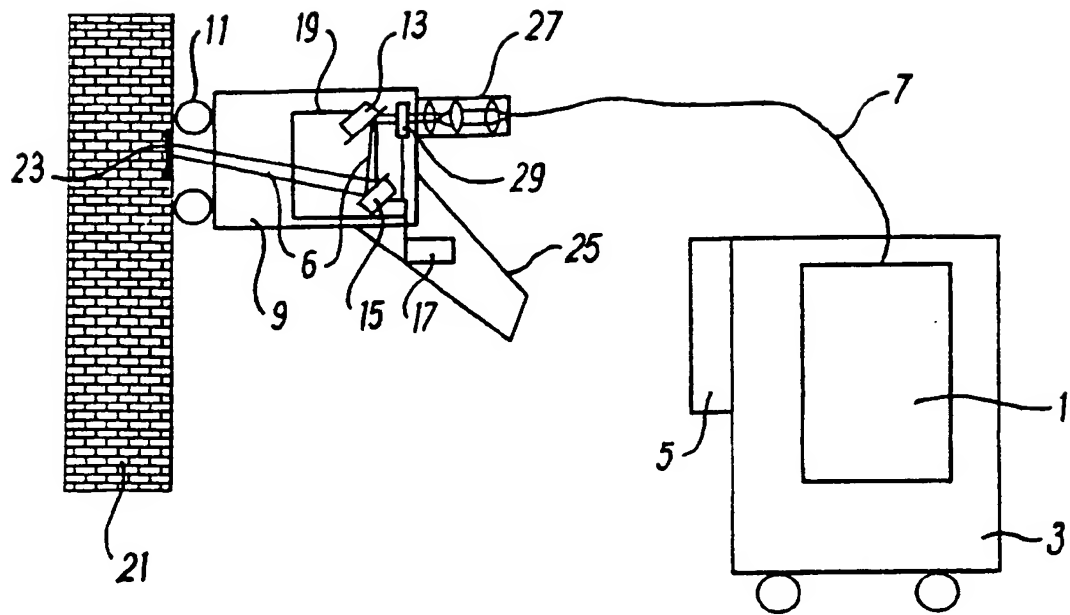

**Fig. 1**

SUBSTITUTE SHEET (RULE 26)

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 95/01421

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 C04B41/50 G21F9/30 G21F9/00 B44C1/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G21F B08B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 015 no. 048 (C-0802) ;5 February 1991 & JP,A,02 279573 (MATSUSHITA ELECTRIC IND CO LTD) 15 November 1990, see abstract	1,2,6, 8-12
Y	---	3-5
A	---	7,13
Y	WO-A-93 13531 (BRITISH NUCLEAR FUELS) 8 July 1993 see claims 1-5,9 see page 2, line 7 - line 30 see page 4, line 14 - line 31 see page 5, line 1 - page 7, line 33	3-5
A	---	13
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

1 September 1995

Date of mailing of the international search report

14. 09. 95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

Rigondaud, B

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 95/01421

C.(Continuabon) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 431 no. 014 (C-0759) ,17 September 1990 & JP,A,02 167873 (SUMITOMO METAL IND. LTD) 28 June 1990, see abstract ---	1,2,6
A	PATENT ABSTRACTS OF JAPAN vol. 015 no. 048 (C-0802) ,5 February 1991 & JP,A,02 279574 (MATSUSHITA ELECTRIC IND CO LTD) 15 November 1990, see abstract ---	1,2,6
A	EP,A,0 475 806 (FRAMATOME) 18 March 1992 see the whole document -----	13,14

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International Application No

PCT/GB 95/01421

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9313531	08-07-93	CA-A- 2093329	05-07-93
		EP-A- 0574564	22-12-93
		JP-T- 6507977	08-09-94
		US-A- 5425072	13-06-95
-----			
EP-A-475806	18-03-92	FR-A- 2666523	13-03-92
		JP-A- 4289500	14-10-92
		US-A- 5256848	26-10-93
-----			

**THIS PAGE BLANK (USPTO)**